

fischer connectors

405 Series
Plastic connectors



MEDICAL



*PORTABLE
EQUIPMENT*



*DATA
ACQUISITION*




INSTRUMENTATION



*HIGH-PERFORMANCE IN A
VERSATILE PACKAGE*



PERFECT PACKAGE

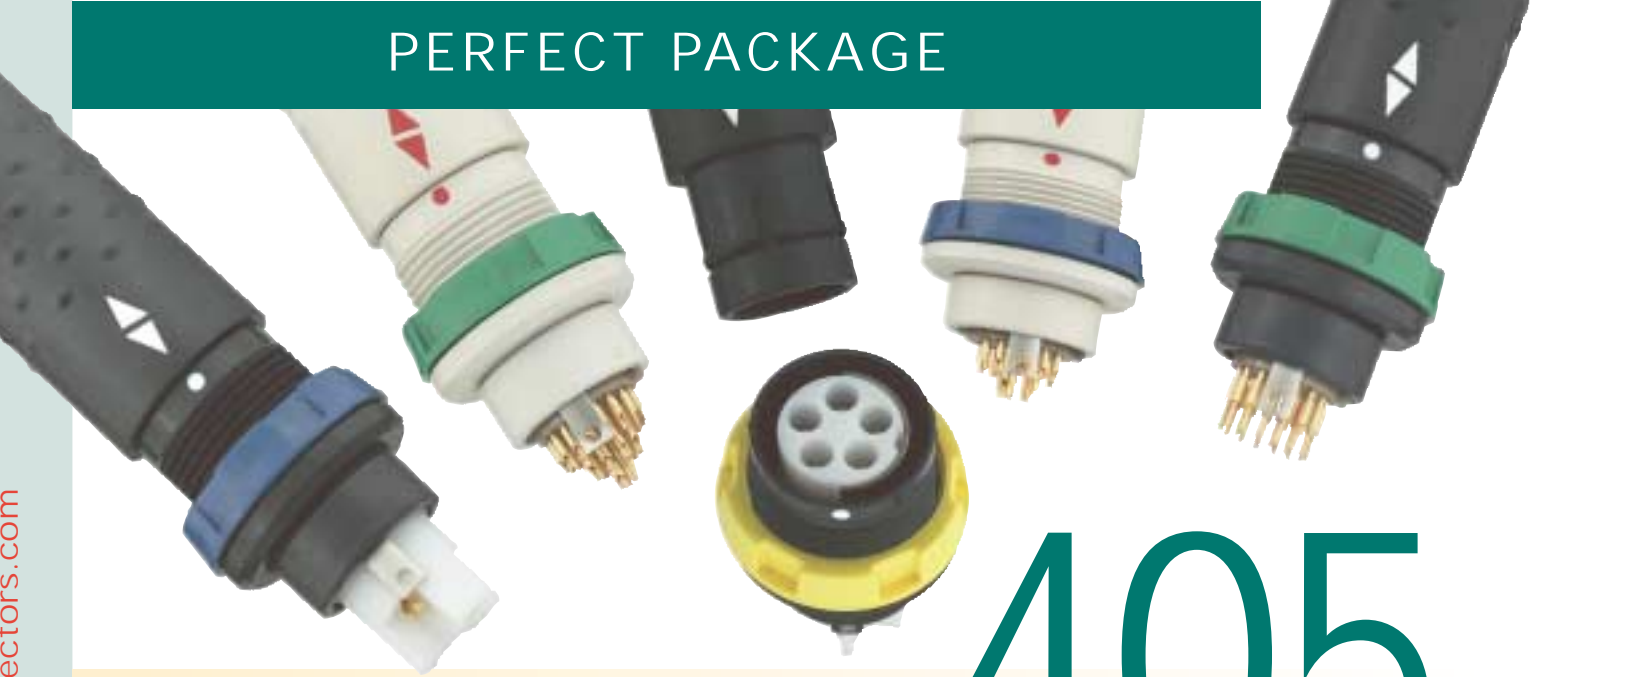

S E R I E S

405

FEATURES

- FDA Class VI approved body material
- Integral shielding available
- Up to 40 contacts
- Gold-plated contacts (greater than 1 µm)
- Greater than 5000 mating cycles
- IP68 sealing available (submersible)
- Intermates with Fischer's 105 Series
- Fischer®-pioneered keying system
- Completely sterilizable
- Integral color coding system

BENEFITS


- Accelerates FDA approval of medical devices
- Ideal for EMI/RFI sensitive applications
- High signal density
- Highly reliable signal path
- Minimizes customer warranty claims
- Ideal for exterior applications
- Excellent design flexibility
- Facilitates easy operation and eliminates contact damage
- Impervious to thousands of cycles: autoclave, Cidex®, EtO, gamma radiation, Steris® or Sterrad®.
- Easy identification of multiple connectors

APPLICATIONS

- ▶ Medical
- ▶ Avionics
- ▶ Instrumentation
- ▶ Data acquisition
- ▶ Test and Measurement
- ▶ Aerospace
- ▶ GPS
- ▶ Military
- ▶ Sensors
- ▶ Marine
- ▶ Petro-chemical
- ▶ Industrial

Connectors And Accessories


IP56 or IP68 Rated

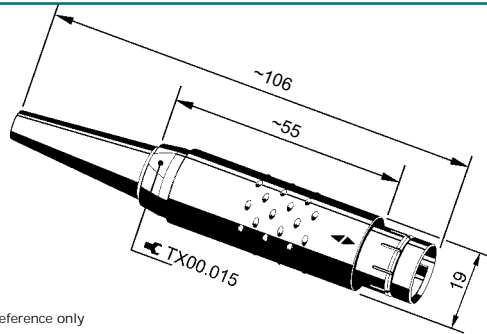

All dimensions shown are in millimeters and are for reference only

S or SI


- Cable plug
- Model S: with integral EMI/RFI shielding - Model SI: without integral EMI/RFI shielding
- Color-coded cap nuts and strain reliefs available
- Accepts cable diameters 4.2 – 10.7 mm (0.17 – 0.42 in.)
- Completely sterilizable via autoclave, Cidex®, EtO, gamma radiation, Steris® or Sterrad®.




(Max. mounting nut torque: 1.8 Nm)

DBP

- Chassis receptacle, rear panel mount
- Completely sterilizable via autoclave, Cidex®, EtO, gamma radiation, Steris® or Sterrad®.
- Color-coded mounting nut permits easy matching to plug



IP56 Rated

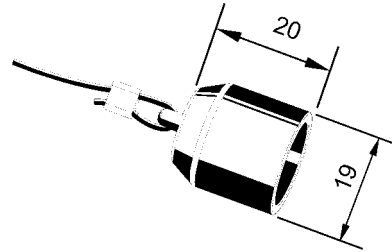

Sealing Caps

- 105.2740 (Beige) / 105.2741 (Black)
- Integral o-ring seals and protects plug when unmated
- Supplied with 200 mm PTFE coated stainless steel lanyard and hardware
- Material: PEI

Materials

Component	Material	Plating
Bodies, Cap Nut, Mounting Nut	PEI	-
Metal Parts (except contacts)	Brass	3 µm Nickel ²
Contacts	Solder: Male: Brass Female: Bronze Crimp: Male: Bronze Female: Bronze	Minimum 1 µm Gold ¹ on 4 µm Nickel ²
Contact Block	PEEK, PTFE or PBT	-
O-rings	NBR	-
Plastic Cable Clamps	POM (Delrin®)	-

¹per AMS2422D or ASTM B488

² similar to MIL-C26074E
































Performance

Temperature Ratings³

Body Style	Body Material	Contact Block Material			
		PEEK	PTFE	PBT	
Cable Mounted	Unsealed:	PEI	-65°C to +200°C	-65°C to +160°C	-65°C to +135°C
	Sealed:		-65°C to +135°C	-65°C to +135°C	-65°C to +135°C
Panel Mounted	PEI	-65°C to +200°C	-65°C to +160°C	-65°C to +135°C	

³Operating temperature range according to chosen Body and Contact Block materials.


Standard Contact Configurations

Designation ¹	Contacts	Test Voltage ² (kVAC)	Maximum Current ³ per Contact (A)	Conductor Maximum (mm / AWG)	Contact Block Material	Available Contact Styles ⁴
405 A001	 1	4.0	45	3.0 / 8	PTFE	J
405 A002	 1	4.8	30	2.9 / 10	PTFE	J
405 A004	 1	13.0 (kVDC)	32	2.9 / 10	PTFE	J
405 A005	 1	14.0 (kVDC)	20	2.0 / 14	PTFE	J
405 A090	 1	6.4	13	1.2 / 20	PTFE	J
405 A051	 2	2.5	26	2.0 / 14	PTFE	J
405 A087	 2	1.2	30	3.1 / 10	PTFE	J
405 A057	 3	8.0 (kVDC)	14	1.2 / 20	PTFE	J
405 A052	 3	2.0	23	2.0 / 14	PTFE	J
405 A053	 4	1.8	20	2.0 / 14	PTFE	J
405 A039	 5	7.0 (kVDC)	11	1.2 / 20	PTFE	J
405 A112	 4 + Gnd	7.0 (kVDC)	12	1.2 / 20	PTFE	J
405 A054	 1 6	2.0 1.5	25 7.0	2.0 / 14 1.2 / 20	PTFE	J
405 A067	 8	1.7	10	1.2 / 20	PTFE	J
405 A101	 1 8	2.0 1.5	25 5.0	2.1 / 14 1.2 / 20	PEEK	J, L
405 A062	 10	1.7	9.0	1.2 / 20	PTFE	J
405 A069	 12	1.4	8.0	1.2 / 20	PEEK	J
405 A104	 3 10	1.5 1.5	14 1.0	1.2 / 20 0.6 / 26	PEEK	J
405 A058	 15	1.4	5.3	0.8 / 22	PEEK	J, K, L
405 A110	 4 12	1.3 1.2	14 1.0	1.8 / 14 0.6 / 26	PEEK	J
405 A038	 18	1.4	4.5	0.8 / 22	PEEK	J, K, L
405 A093	 24	1.2	3.5	0.6 / 26	PBT	J, L
405 A102	 27	1.2	3.0	0.6 / 26	PEEK	J, L
405 A122	 40	Please contact us for additional information				
405 A074	 Coax + 1	4.5 1.6	12 12	1.0 / 20 1.1 / 20	PTFE	Coax=K J
405 A089	 Coax + 4	4.5 1.5	12 7.0	1.0 / 20 0.75 / 24	PTFE	Coax=K J
405 A095	 Coax + 9	1.8 1.5	4.0 6.0	0.55 / 30 0.75 / 24	PTFE	Coax=K J
405 A105	 4 Coax (50 Ohm)	Please contact us for additional information				
405 A020	 H.V. + 2	6.0 0.8	18 12	2.0 / 20 1.1 / 14	PTFE	J
405 A036	 H.V. + 4	6.0 1.8	18 12	2.0 / 20 1.1 / 14	PTFE	J
405 A060	 H.V. + 7	6.0 1.6	16 10	2.0 / 20 1.1 / 14	PTFE	J

¹Some versions available with reverse polarity (Z) ²per IEC 512-2, 4a ³per IEC 512-3, 5a ⁴J = Solder; K = Crimp; L = PCB

Part Numbers

CONNECTORS

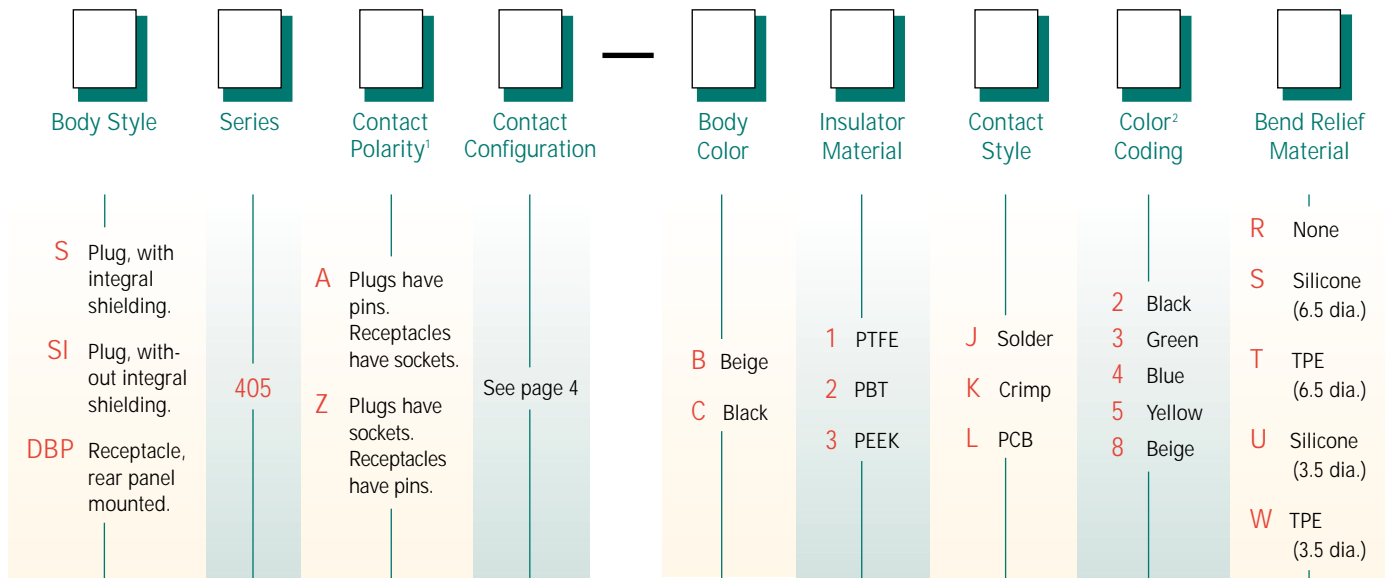

¹ Except high voltage versions

² Plug: Cap nut
Receptacle: Mounting nut

CABLE CLAMP SETS

To be ordered separately

CLAMP TYPE	Cable O.D. (mm)	Use with PEEK or PBT Insulators	Use with PTFE Insulators	CLAMP TYPE	Cable O.D. (mm)	Use with PEEK or PBT Insulators	Use with PTFE Insulators
UNSHIELDED METAL For use with unshielded cable or when shield is not carried through connector body.	2.5 – 3.5	E3 105.6/3.5	E3 105.5/3.5	SHIELDED METAL For use with shielded cable when shield is to be carried through connector body.	3.2 – 4.2	E3 105.1/4.2 + B	E3 105.1/4.2 + A
	3.5 – 4.5	E3 105.6/4.5	E3 105.5/4.5		4.2 – 5.2	E3 105.1/5.2 + B	E3 105.1/5.2 + A
	4.5 – 5.5	E3 105.6/5.5	E3 105.5/5.5		5.2 – 6.2	E3 105.1/6.2 + B	E3 105.1/6.2 + A
	5.5 – 6.5	E3 105.6/6.5	E3 105.5/6.5		6.2 – 7.2	E3 105.1/7.2 + B	E3 105.1/7.2 + A
	6.5 – 7.5	E3 105.6/7.5	E3 105.5/7.5		7.2 – 8.2	E3 105.1/8.2 + B	E3 105.1/8.2 + A
	7.5 – 8.5	E3 105.6/8.5	E3 105.5/8.5		8.2 – 9.2	E3 105.1/9.2 + B	E3 105.1/9.2 + A
	8.5 – 9.5	E3 105.6/9.5	E3 105.5/9.5		9.2 – 10.0	E3 105.1/10.0 + B	E3 105.1/10.0 + A
9.5 – 10.5	E3 105.6/10.5	E3 105.5/10.5	10.0 – 10.7	E3 105.1/10.7 + B	E3 105.1/10.7 + A		

UNSHIELDED PLASTIC For use with high voltage connectors.	2.8 – 4.2	–	105.1010	SEALED For use when sealing shielded or unshielded cable to plug body.	3.2 – 4.2	E31 105.2/4.2 + B	E31 105.2/4.2 + A
	4.1 – 5.5	–	105.1356		4.2 – 5.2	E31 105.2/5.2 + B	E31 105.2/5.2 + A
	5.1 – 6.5	–	105.793		5.2 – 6.2	E31 105.2/6.2 + B	E31 105.2/6.2 + A
	6.1 – 7.5	–	105.921		6.2 – 7.2	E31 105.2/7.2 + B	E31 105.2/7.2 + A
	6.6 – 8.0	–	105.1111		7.2 – 8.2	E31 105.2/8.2 + B	E31 105.2/8.2 + A
	7.1 – 8.5	–	105.794		8.2 – 9.2	E31 105.2/9.2 + B	E31 105.2/9.2 + A
	8.3 – 9.7	–	105.1124		9.2 – 10.0	E31 105.2/10.0 + B	E31 105.2/10.0 + A
9.1 – 10.5	–	105.795	10.0 – 10.7	E31 105.2/10.7 + B	E31 105.2/10.7 + A		

Headquarters Switzerland
W.W. FISCHER SA
Case Postale
CH-1143 Apples
Tel. +41 21 800 95 95
Fax +41 21 800 39 24
www.fischerconnectors.ch
mail@fischerconnectors.ch

• Subsidiaries

America: North, Central, and South
W.W. FISCHER Inc.
Atlanta
Tel. +1 770 352 0606
Fax +1 770 352 0992
www.fischerconnectors.com
mail@fischerconnectors.com

Asia
W.W. FISCHER ASIA Ltd.
Hong Kong
Tel. +852 2268 6837
Fax +852 2268 6729
mail@fischerconnectors.com.hk

France
W.W. FISCHER Sarl
Paris
Tel. +33 1 5578 2578
Fax +33 1 5578 2575
www.fischerconnectors.fr
mail@fischerconnectors.fr

Germany and Eastern Europe
W.W. FISCHER GmbH
Kirchseeon-Eglharting
Tel. +49 8091 5583 0
Fax +49 8091 5583 23
www.fischerconnectors.de
mail@fischerconnectors.de

Italy
W.W. FISCHER Srl
Monza
Tel. +39 039 321 275
Fax +39 039 326 766
www.fischerconnectors.it
mail@fischerconnectors.it

United Kingdom and India
W.W. FISCHER Ltd.
Waterlooville/Hampshire
PO7 7XN
Tel. +44 2392 241 122
Fax +44 2392 257 596
www.fischerconnectors.co.uk
sales@fischerconnectors.co.uk



• Representatives

Austria
FISCHER ELEKTRONIK GmbH
1130 Wien
Tel. +43 1 876 6227
Fax +43 1 876 6227 11
online@fischerelektronik.co.at

Australia / New Zealand
EDWARD KELLER Australia Ltd.
3803 Hallam Victoria
Tel. +61 3 9554 6666
Fax +61 3 9554 6699
electrical@edwardkeller.com.au

Belgium
Ets. MICHEL DECAMP SA
1420 Braine L'Alleud
Tel. +32 2 385 0035
Fax +32 2 385 0368
info@decamp.be

Denmark
ROSENBERGER DANMARK a/s
3460 Birkerød
Tel. +45 4582 0740
Fax +45 4281 0394
reception@rosenberger.dk

Finland
ARROW FINLAND OY
02600 Espoo
Tel. +358 9 476 660
Fax +358 9 476 663 27
stefan.roer@hatteland.com

Israel
C.V.S. TECHNOLOGIES 1974 Ltd.
Tel-Aviv 69710
Tel. +972 3648 7475
Fax +972 3647 4379
ctech@attglobal.net

Japan
K. TOKIWA & Co. Inc.
Asahiseimei-Ohmori Bldg.
Ohta-Ku, Tokyo 143
Tel. +81 3 3766 6701
Fax +81 3 3766 1300
tkw-shoko@k-tokiwa.co.jp

Netherlands
SPEETS vof
4902 PA Oosterhout
Tel. +31 162 433 841
Fax +31 162 453 964
info@speets.nl

Norway
T&G ELEKTRO A/S
1321 Stabekk
Tel. +47 67 129 050
Fax +47 67 129 060
epost@tgelektro.no

Sweden
POLAB Elektronik AB
42750 Billdal
Tel. +46 31 910 420
Fax +46 31 912 380
info@polab.com

Singapore
COASTAL ELECTRONICS Pte Ltd.
03-76 Sim Lim Square
0718 Singapore
Tel. +65 6 338 3076
Fax +65 6 339 5185
coastal.elect@pacific.net.sg

Spain
SUMINISTROS DE CONECTORES
PROFESIONALES SA
28022 Madrid
Tel. +34 91 355 6006
Fax +34 91 356 9525
compras@scp-sa.es

South Africa
SUNTRONIKA (Pty) Ltd.
2001 Braamfontein/Johannesburg
Tel. +27 11 403 3420
Fax +27 11 403 4050
salesupp@suntronika.com

